



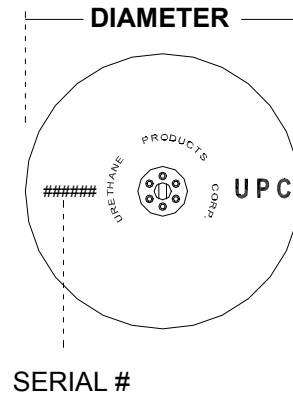



MARINE GUARD™ Foam Filled Fenders

6.0 ft (1.8 m) Diameter x 16.0 ft (4.9 m) Long

Standard Capacity

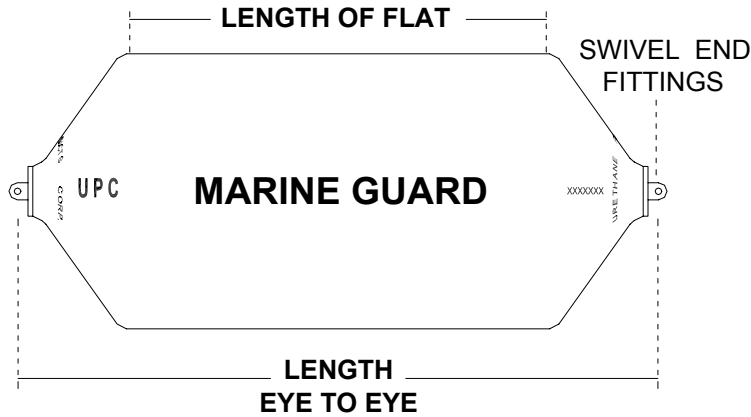

6.0 Ft. DIAMETER x 16.0 Ft. LONG	English	Metric
PERFORMANCE* (AT 60% COMPRESSION)		
Energy absorption, ft-kip (ton-m)	427	59
Reaction force, kip (ton)	265	120
DIMENSIONS AND WEIGHT		
Diameter, ft (m)	6.0	1.8
Length eye-to-eye, ft (m)	16.0	4.9
Length of flat, ft (m)	11.4	3.5
Skin thickness, in (mm)	1.25	32
Weight, lb. (kg)	3,750	1,700
Cube, ft ³ (m ³)	625	18
TECHNICAL DATA		
Standoff distance:		
Maximum, ft (m)	6.0	1.8
At 60% compression, ft (m)	2.4	0.7
Safe working end-pull load, kip (kN)	50	222
FOOTPRINT (AT 60% COMPRESSION)		
Maximum width, ft (m)	7.5	2.3
Maximum length, ft (m)	12.9	3.9
Area, ft ² (m ²)	73.6	6.8
RECOMMENDED SIZES OF MOUNTING HARDWARE		
Chain, in (mm)	1.75	44
Shackles, in (mm)	1.75	44
Swivels, in (mm)	1.75	44

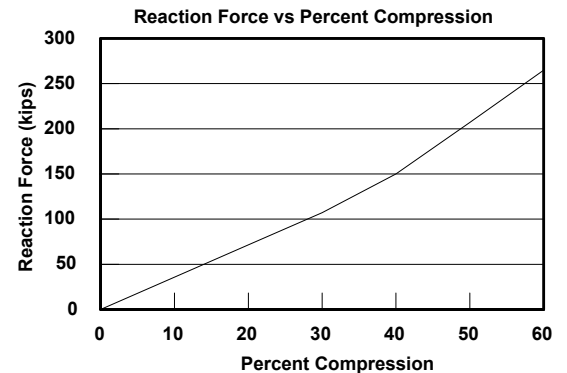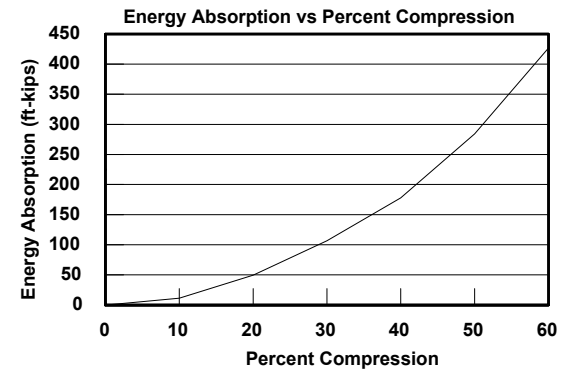

*Above information is for our Standard Capacity *Marine Guard*™ foam filled marine fenders. Actual values for all sizes may vary plus or minus 15% from stated values due to variations in material properties, dimensional tolerances, temperature and speed of compression.